


DE-COMP COMPOSITES, INC.

D5300

High Performance Release Film

D5300 is a fluoropolymer film ETFE that provides excellent release in critical contour lay-ups.

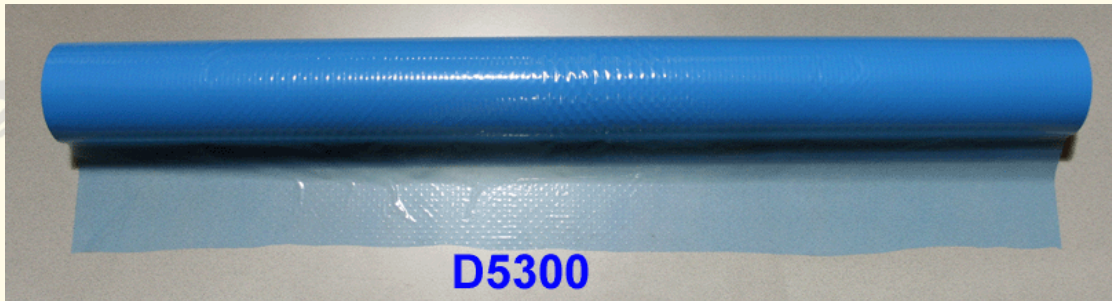

PROPERTIES		
Tensile Strength (psi)		7,000
Elongation (%)		300
Tear Resistance (N/mm)	MD TD	600 400
Melt Point		482-518°F 250-270°C
Maximum Use Temperature		330°F/165°C
Thickness (inches)		0.001
Yield (ft ² /lb)		110
Standard Roll Size		48" x 500' 50" x 500' 60" x 600'
Color		Blue or Red

NOTE: THE INFORMATION CONTAINED HEREIN IS BELIEVED BY DE-COMP COMPOSITES, INC. TO BE ACCURATE; HOWEVER, NO WARRANTY EXPRESSED OR IMPLIED IS MADE REGARDING THIS DATA. THIS MATERIAL, OR RESULTS THERE FROM WHETHER USED IN ACCORDANCE WITH OUR INSTRUCTIONS OR NOT. THE USER SHALL MAKE HIS/HER OWN TESTS TO DETERMINE SUITABILITY OF THIS MATERIAL FOR HIS/HER PARTICULAR PURPOSES, IN ANY EVENT, DE-COMP'S LIABILITY SHALL BE LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

Page Last Modified: 03/27/2007

Section: Release Films

1519 Eastgate Drive • Cleveland, Oklahoma 74020 • Phone: 918.358.5881 • Fax: 918.358.3750
E-Mail: email@decomp.com • Web Site: www.decomp.com
Toll Free: 877.609.5088