


# DE-COMP COMPOSITES, INC.

## D860

### BAGGING FILM

D860 is a modified nylon. It is a wide film that has very good chemical resistance. D860 is a room-temp film not used over 210°F.

D860 is recommended as a debulking, vacuum infusion, scrimp, vartim, and vimp

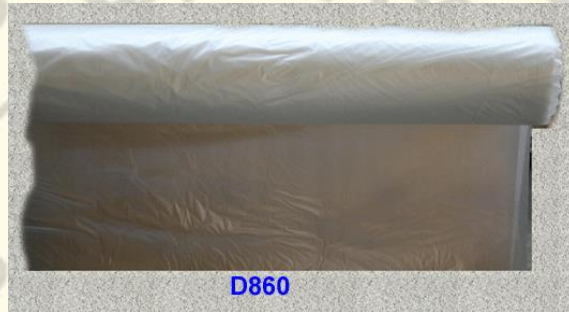

TYPICAL PROPERTIES	
Color	Clear
Elongation (%)	300
Tearing Strength (gm/mil)	90
Minimum Use Temperature	210°F / 99°C
Thickness (inches)	0.002
Widths (inches)	110" V-Fold
Weight per roll	106 lbs

#### SUGGESTED STORAGE METHOD:

All nylon films are known to be hydrophilic. They absorb up to 2.5% of surrounding humidity, therefore, it is recommended that this film be kept in a sealed plastic bag.

#### PRINTABLE VERSION

NOTE: THE INFORMATION CONTAINED HEREIN IS BELIEVED BY DE-COMP COMPOSITES, INC. TO BE ACCURATE. HOWEVER, NO WARRANTY EXPRESSED OR IMPLIED IS MADE REGARDING THIS DATA, THIS MATERIAL, OR RESULTS THERE FROM WHETHER USED IN ACCORDANCE WITH OUR INSTRUCTIONS OR NOT. THE USER SHALL MAKE HIS/HER OWN TESTS TO DETERMINE SUITABILITY OF THIS MATERIAL FOR HIS/HER PARTICULAR PURPOSES, IN ANY EVENT, DE-COMP'S LIABILITY SHALL BE LIMITED TO THE PURCHASE PRICE OF THE MATERIAL.

[Home Page](#)[Product List](#)[Top of Page](#)[E-mail De-Comp](#)

Page Last Modified: 04-15-14

Section: Bagging Films

1519 Eastgate Drive • Cleveland, Oklahoma 74020 • Phone: 918.358.5881 • Fax: 918.358.3750 E-Mail: email@decomp.com • Web Site: www.decomp.com Toll Free: 877.609.5088